

Mighty Lite II[®]

Modular Sheeting Solutions


A modular soil support system and sheeting box in one!

- ★ Professional Engineer Certified
- ★ Accommodates sheeting panels
- ★ Pin in place walers
- ★ Positive direct connections
- ★ Foam fill optional
- ★ Adjustable lifting lugs (allows low lift)
- ★ Stackable (tongue and groove alignment)

TOP HANGERS WITH LIFTING LUGS



SHEETING EXTENDS BELOW THE UNIT

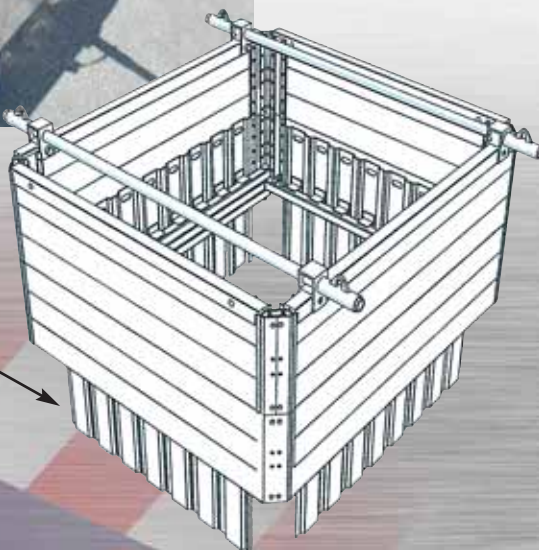

MIGHTY LITE II

MODEL	HEIGHT	LENGTH	WEIGHT EACH SIDE	SHIELD CAPACITY (PSF)	APPROXIMATE DIGGING DEPTH (FT.) & SOIL TYPE			
					A 25	B 45	C 60	C 80
22-ML2	2'	2'	39#	49441#	126	70	52	40
23-ML2	2'	3'	44#	14373#	126	70	52	40
24-ML2	2'	4'	54#	6735#	126	70	52	40
25-ML2	2'	5'	66#	3892#	126	70	52	40
26-ML2	2'	6'	78#	2532#	126	70	52	40
27-ML2	2'	7'	88#	1788#	88	49	37	28
28-ML2	2'	8'	98#	1317#	65	36	27	21
210-ML2	2'	10'	120#	825#	40	22	16	13
212-ML2	2'	12'	140#	600#	25	14	10	8
45-ML2	4'	5'	132#	3892#	194	108	81	61
46-ML2	4'	6'	156#	2532#	126	70	52	40
48-ML2	4'	8'	196#	1317#	65	36	27	21
410-ML2	4'	10'	240#	825#	40	22	16	13
412-ML2	4'	12'	280#	600#	25	14	10	8
65-ML2	6'	5'	198#	3892#	194	108	81	61
66-ML2	6'	6'	234#	2532#	126	70	52	40
68-ML2	6'	8'	294#	1317#	65	36	27	21
610-ML2	6'	10'	360#	825#	40	22	16	13
612-ML2	6'	12'	420#	600#	25	14	10	8
85-ML2	8'	5'	264#	3892#	194	108	81	61
86-ML2	8'	6'	312#	2532#	126	70	52	40
88-ML2	8'	8'	392#	1317#	65	36	27	21
810-ML2	8'	10'	480#	825#	40	22	16	13
812-ML2	8'	12'	560#	600#	25	14	10	8

*** PSF Ratings and depths are based on short term exposure with excavation open a period of time equal to 24 hours or less. Consult manufacturer should long term exposure be required. Depths are based on A, B, C soil types are described in OSHA's 29 CFR Part 1926 Subpart P, October 31, 1989 with Type A not exceeding 25 PSF per foot of depth. Type B not exceeding 45 PSF per foot of depth. Type C-60 not exceeding 60 PSF per foot of depth and Type C-80 not exceeding 80 PSF per foot of depth. Determine actual soil pressures and consult Manufacturers Tabulated Data prior to each use.

SCREW JACK SELECTION

Includes special gravity pins

MODEL	WIDTH	WEIGHT (EACH)
SJ-23	2'-3'	21#
SJ-35	3'-5'	30#
SJ-57	5'-7'	37#
SJ-79	7'-9'	45#

ACME THREADS MACHINED FROM SOLID STEEL, NICAD PLATED, HELD IN PLACE WITH 4-ONE PIECE 5/8" DIAMETER GRAVITY PINS.

CORNER POST SELECTION

MODEL	LENGTH	WEIGHT (EACH)
CP24	24"	18#
CP48	48"	34#
CP72	72"	50#
CP96	96"	67#
CP120	120"	84#



Transportable in a pickup truck, van or American Shoring shoring trailer

SEE PAGE 19

AMERICAN SHORING INC.

1.800.407.4674
www.americanshoring.com