

EASY INSTALLATION AND REMOVAL WMINUTES!






FROM YELLOW WEBBING SIDE OF BRACE, ATTACH HOOK TO THE BRACKET RING.



LOOP THE RED WEBBING AND HOOK AROUND LADDER SIDE RAIL AND CLIP TWIST HOOK TO FYF RING.




TIGHTEN BELT BY **PULLING YELLOW** ADJUSTING BELT



REPEAT STEPS 1 THRU 3 ON OTHER SIDE OF LADDER. LADDER IS NOW SECURE AND MAY BE USED SAFELY.

Make any box "Slip-Not" ready!

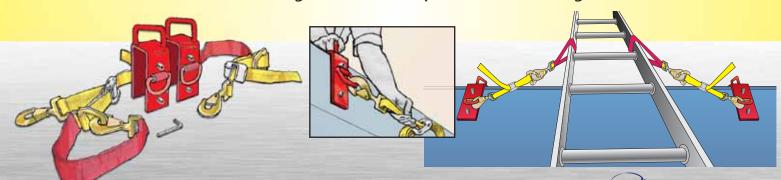

With Our Bolt-On Slip-Not Clamp and Bracket Sets

Comes complete with two adjustable ladder straps, two bolt on brackets with ring anchors, stainless steel set screws and allen wrench.

