


Heavy Duty Bolted

GLX Rigid Bolted Heavy Duty Trench Shield

- ★ **Constructed of high strength steel and high alloy steel**
- ★ **Wall thickness available in 6", 8" or 10"**
- ★ **Vertical front knife edges**
- ★ **Professional Engineer Certified**
- ★ **Extra long bottom knife**
- ★ **3/4" front and bottom anti-wear edges**
- ★ **Lift, push, or pull by direct bucket contact**
- ★ **Guides for rear cut off plate**
- ★ **Interchangeable widths**
- ★ **Choice of heights: 4', 6', 8', 10' or 12' high panels**
- ★ **Standard lengths to 40'**
- ★ **Impact distribution pads**
- ★ **Hardwood core**

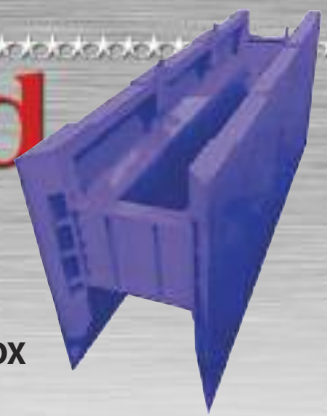

GLX CLASS BOLTED BOX

6" WALL-6GLX TRENCH SHIELD MODEL	HEIGHT	LENGTH	WEIGHT	APPROXIMATE DIGGING DEPTH (FT.) & SOIL TYPE			
				A	B	C	80
				25	45	60	
6GLX417	4'	17'	5050#	84	48	37	29
6GLX419	4'	19'	5500#	56	33	26	20
6GLX421	4'	21'	6000#	52	31	24	19
6GLX425	4'	25'	7050#	43	26	20	16
6GLX427	4'	27'	7500#	35	21	17	14
6GLX617	6'	17'	7200#	84	48	37	29
6GLX619	6'	19'	7900#	56	33	26	20
6GLX621	6'	21'	8600#	52	31	24	19
6GLX625	6'	25'	10000#	43	26	20	16
6GLX627	6'	27'	10500#	35	21	17	14
6GLX817	8'	17'	8600#	72	42	32	25
6GLX819	8'	19'	9300#	56	33	26	20
6GLX821	8'	21'	10000#	52	31	24	19
6GLX825	8'	25'	12000#	43	26	20	16
6GLX827	8'	27'	12500#	35	21	17	14
6GLX1017	10'	17'	9800#	75	43	34	26
6GLX1019	10'	19'	11500#	62	36	28	22
6GLX1021	10'	21'	12000#	50	30	23	18



16' HIGH HEAVY DUTY BOLTED TRENCH BOX



BOX CULVERT INSTALLATION WITH 18' HIGH X 18' WIDE CLEARANCES



HEAVY DUTY BOLTED SPREADERS FEATURE "WINDOWS" FOR BETTER OPERATOR VIEWING. ADDITIONAL SPACERS CAN BE ADDED FOR WIDTH CHANGES